

Small capacity air pump

KP-4020 / 5030 / 6035



Pressure use

Numerous nozzle configurations available

Hausing use (High noise reduction)

Indoor use


Applications

- Air mat, Air bed (continuous air exhaust)
- Air bearing
- Air massager
- Scientific & chemical instruments (analysis and agitation)

*The nozzle position of images are examples.

Dimensions

(unit : mm)

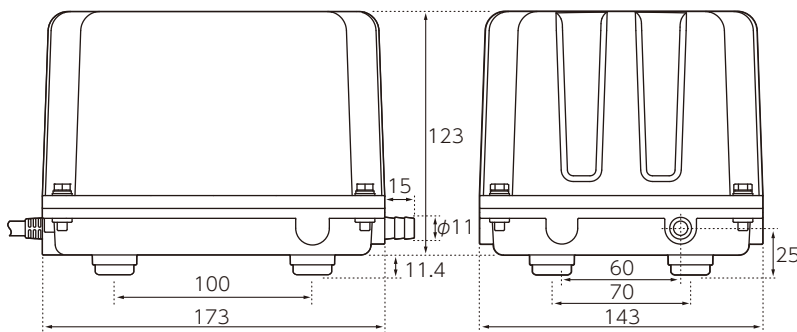

*The figure represents the standard configuration. Customization of nozzle position is available.




Specifications

	KP-4020	KP-5030	KP-6035
Rated voltage [V]	AC230		
Frequency [Hz]	50		
Airflow Volume [L/min]	37	43	45
Rated Pressure [mbar]	100	100	100
Max Pressure [mbar]	215	287	342
Wattage [W]	16	23	24
Weight [kg]	3.8		

*Sound data shown is with pump operating at 10kPa and exhaust plumbed away from the unit.

Performance Curve

— 50Hz

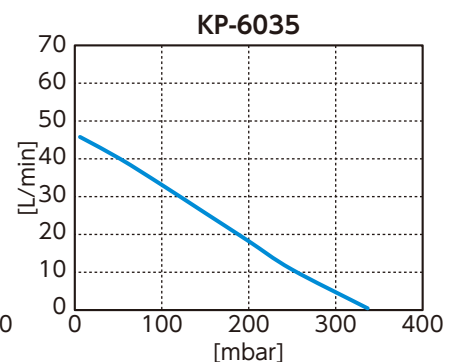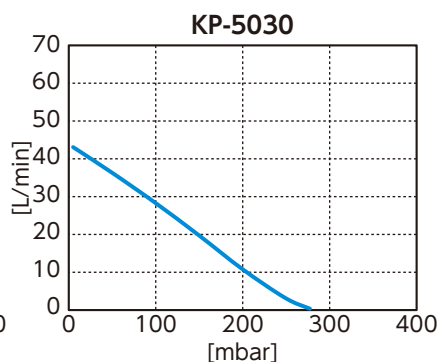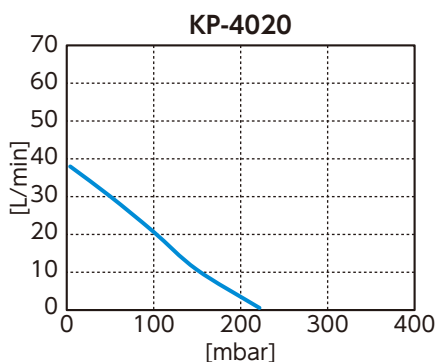

* All characteristics values are only for reference, and are not guaranteed values.

* Note that the operating temperature for our pumps is 41°F(5°C) to 104°F(40°C).