

Small & medium capacity air pump XP-40/60/80



Pressure use

Dust control "Dust trap filter"

Easy restart by micro switch (XP-60 / 80 only)

No need of grounding

Outdoor (Rainproof) use

Applications


- Septic tank (biological contact aeration)
- · Air injection for bubble bath
- Small capacity compressor

Dimensions

(unit: mm) 132 208 186 (THIBLOW) φ18 90

Specifications

	XP-40	XP-60	XP-80
Rated voltage [V]	AC230		
Frequency [Hz]	50		
Airflow Volume [L/min]	40	60	80
Rated Pressure [mbar]	128	147	147
Max Pressure [mbar]	200	235	275
Wattage [W]	24	32	51
Weight [kg]	4.1	4.3	

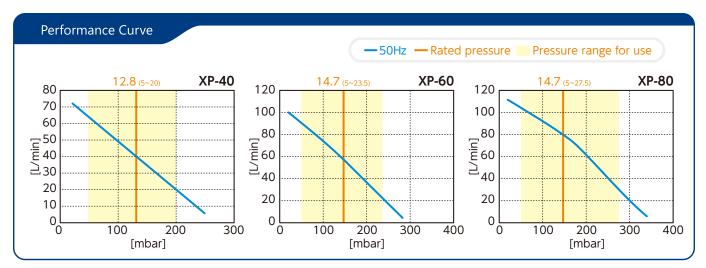

- * All characteristics values are only for reference, and are not guaranteed values
- * Note that the operating temperature for our pumps is 41°F (5°C) to 104°F (40°C). * Operation of this model at 230V/60Hz is not guaranteed.